




www.BoeschPumps.com

VARIABLE SPEED BOOSTER
SYSTEMS


BTW SERIES

60 HZ

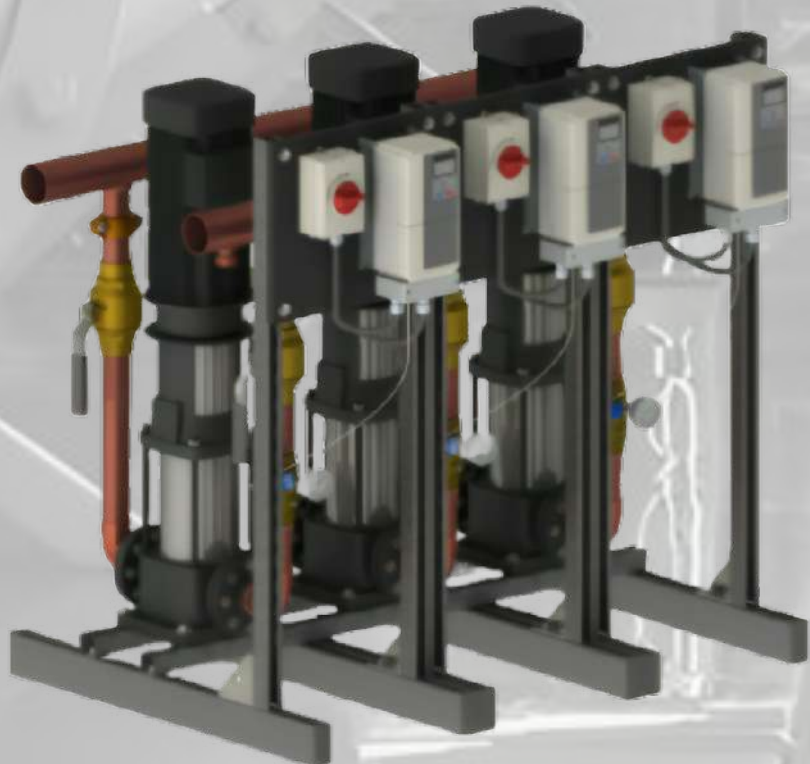

BOESCH PUMPS INC
Art Chibli
(305) 999-1769
achibli@boeschpumps.com
14031 SW 143rd Court Miami, FL 33186

BTW3018T-200W-60 TRIPLEX VARIABLE SPEED BOOSTER PUMP SYSTEM

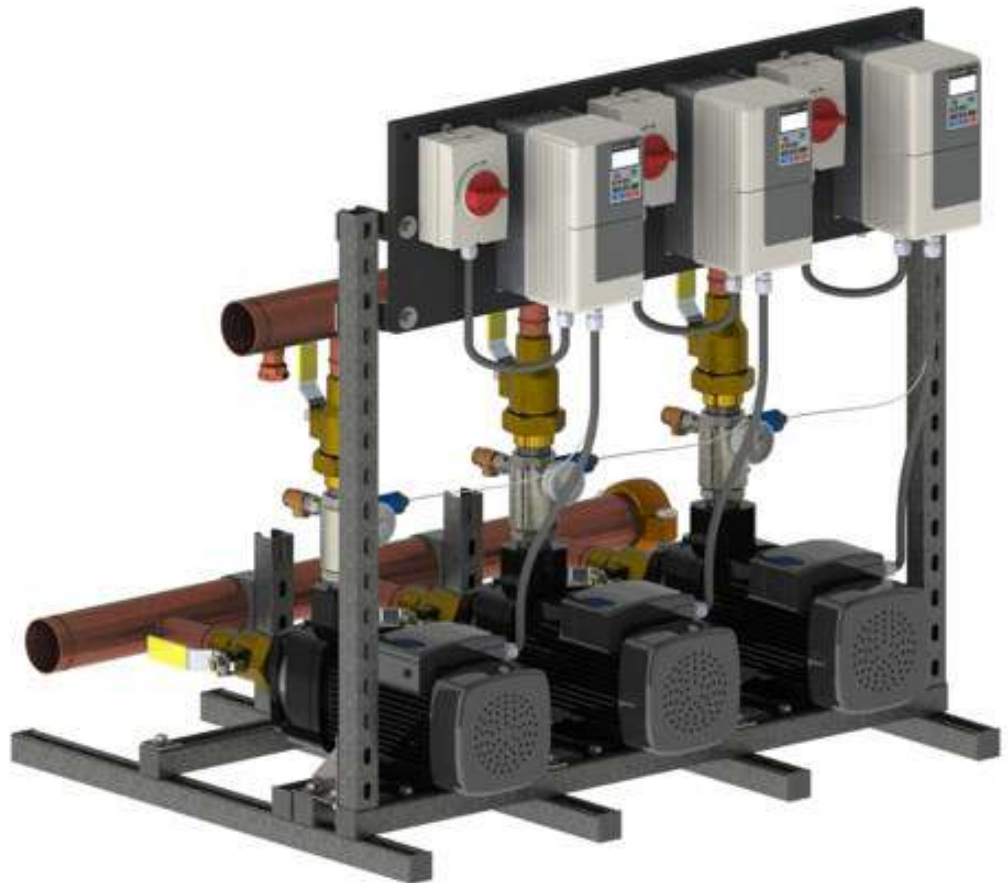

The **BTW3018T-200W.60 Triplex Booster Pump System** is equipped with centrifugal pumps regulated by variable frequency drives that control the pump to maintain constant pressure regardless of varying demand or fluctuating incoming pressure.

VFD drives will ALTERNATE lead pump every 24 hours of run time. Second and third pump will remain on standby.



Lead-Free (Wetted) components:

- Pumps: Cast Iron or SS Option (upgrade)
- Relief valves: LF Brass
- Pressure Gauges: LF Brass
- Transducers: Stainless Steel
- Check valves: LF Brass
- Ball Valves: LF Brass
- Manifolds: Type L Copper
- Fittings: LF Brass or SS

*All parts shown included
Actual system components may vary
Some assembly required*

* All lead-free brass shall contain <.25% Pb

Technical Specifications:

Pumps: Walrus [12T-5K]
Horse Power: 4 HP per pump

VF Drives: Yaskawa

Flow Rate: 200 GPM (66.6 GPM per pump)
Boost: 60 PSI
Set Pressure: TBD


Manifolds: 3 Inch
Tank: 26 Gallon non-ASME


Frame: 43"W X 43"H X 34"D




Power options: Three Independent circuits required
208-220V/1PH
208-220V/3PH
360-480V/3PH

Specify when ordering

Performance curve for each pump

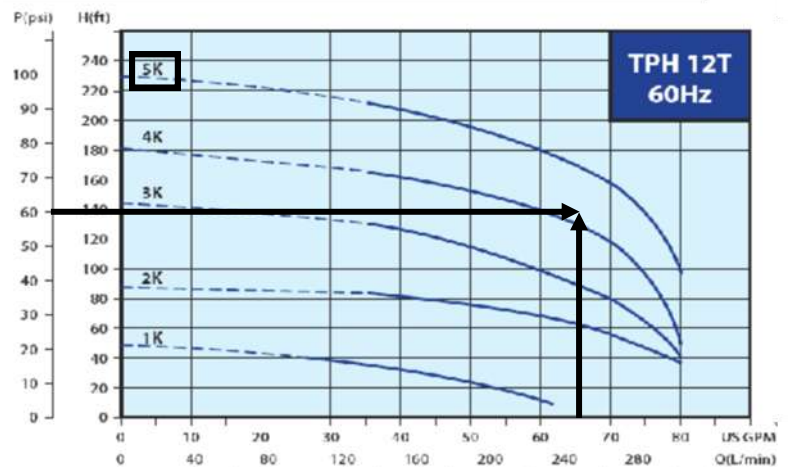

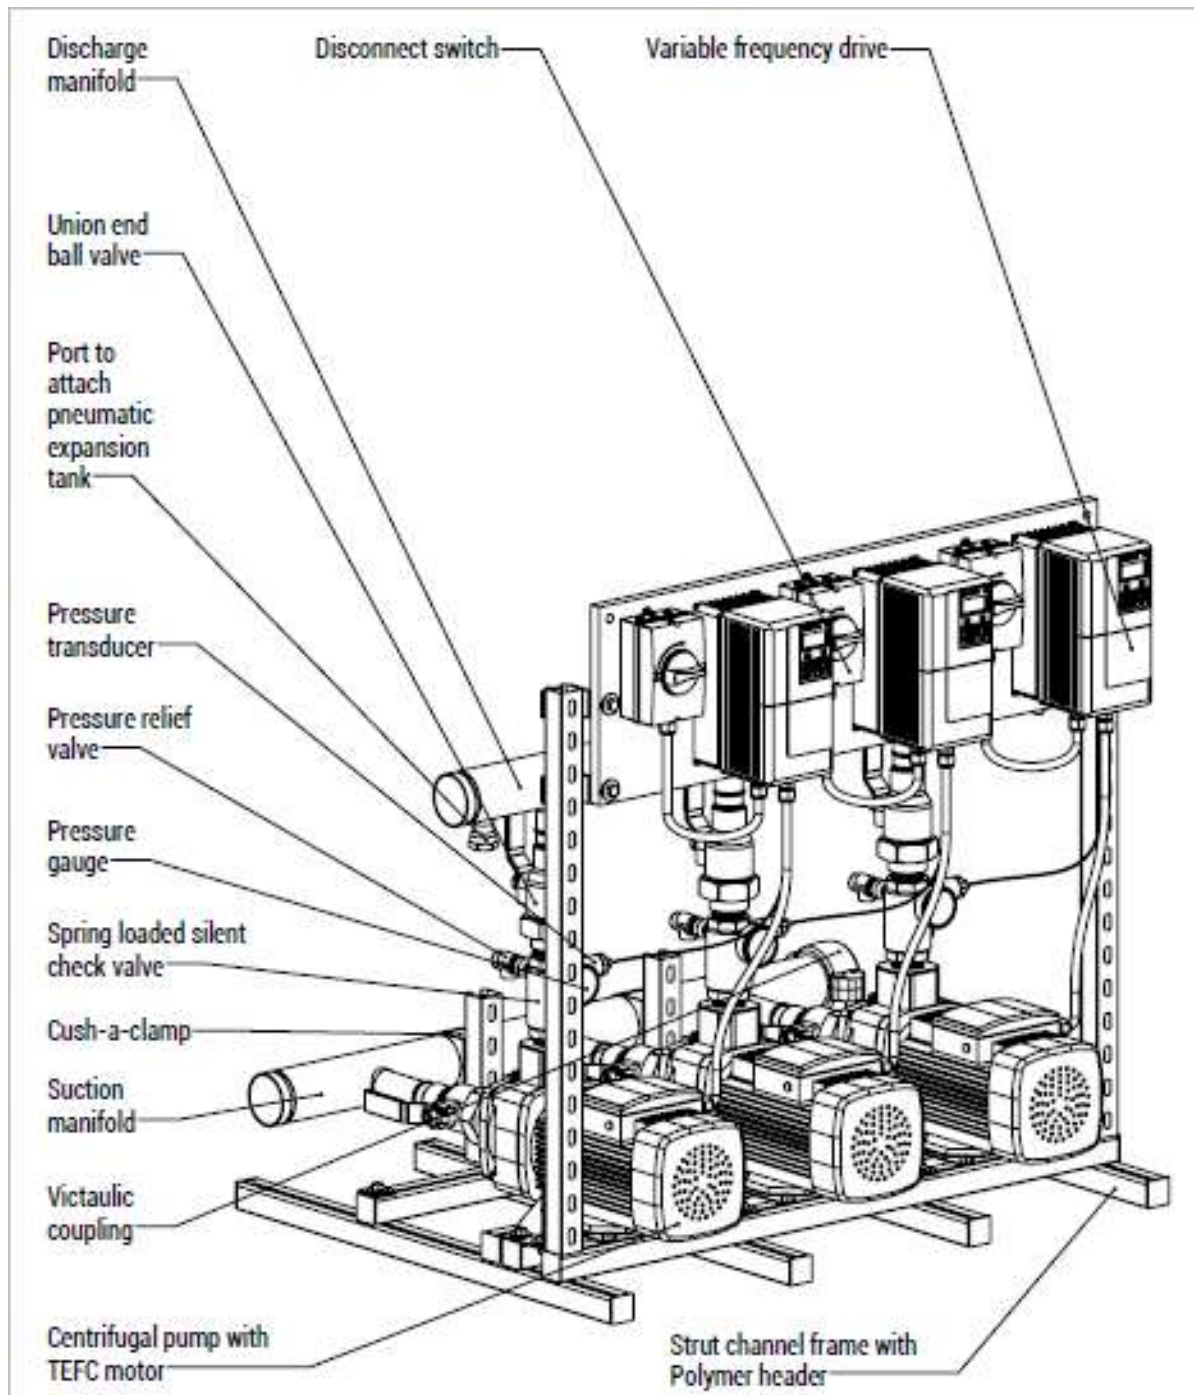

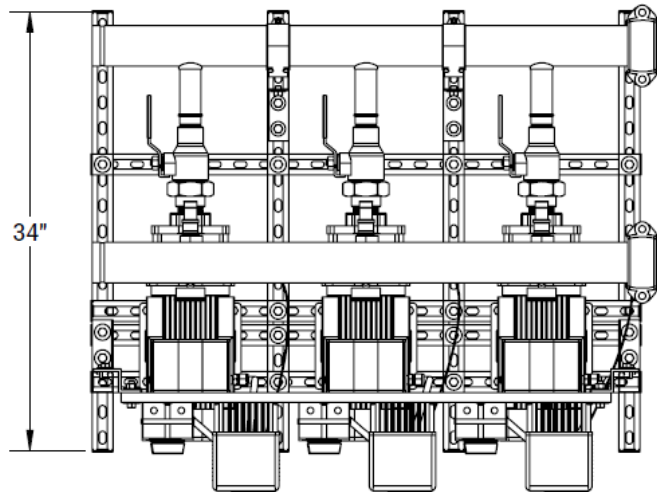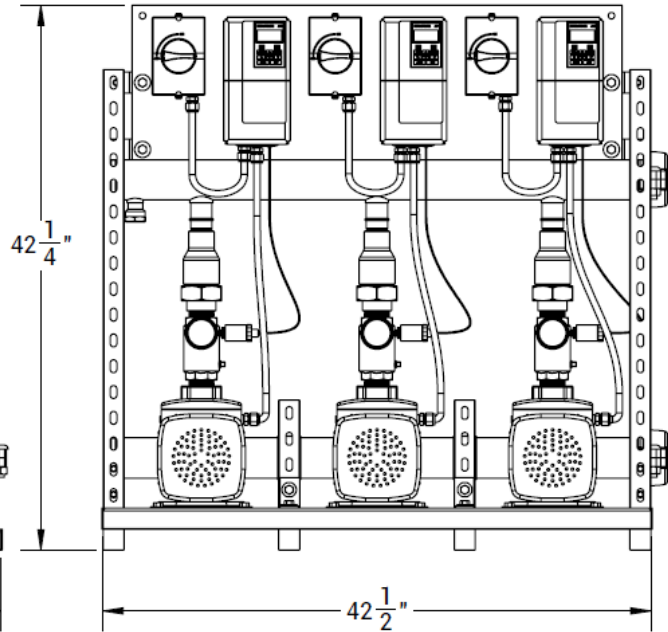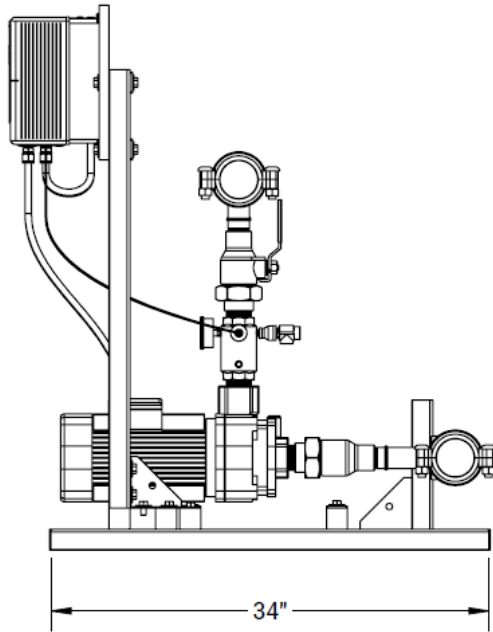

Assembled Units:

- All “wetted surfaces” shall be lead free (<.25% Pb) in conformance with the 1/4/14 federal law
- Shall include a separate and independent variable frequency drive (VFD) for each pump with a pressure transducer, pressure gauge, and relief valve. Piping and frame shall not interfere with access to the controls
- Each pump shall include isolation valves on both the suction and discharge piping
- Each pump shall have a separate and independent disconnect box
- Shall be mounted on a frame for ease of transport and installation.

Variable frequency drive:

- Will ALTERNATE the lead pump every 24 hours (field adjustable) of run time. The lag pump shall be in standby
- Shall have hands-off automatic (HOA) capability
- Rated to operate using specified power requirement. The drive efficiency shall be 98% or better
- Have UL approval with all factory installed options and preset values and/or last saved data values will remain available to the operator after power outage
- Shall have at least NEMA 1 rated conduit enclosure
- The program will protect the pumps against damaging hydraulic conditions such as:
 - Motor overload, Pump overflow surges, Loss of prime due to incoming water supply interruption, Hunting
 - Protection from overload through frequency/current optimization
 - Protection from hydraulic damage by restricting the pumps to operate beyond their published end of curve
- Shall have the ability to automatically restart after an over-current, over-voltage, under-voltage or loss of input signal
- Shall have an operator control panel [keypad] for customization of parameters
- Shall include a feature to upload/download parameters into an external device to be used with another drive or the same drive
- Shall have a removable non-volatile memory device
- Shall be capable of accepting individual analog inputs from transducer. All transducer inputs must be wired to the variable frequency drive for continuous scan and comparison function
- Ladder logic program shall utilize a proportional - integral - derivative control function
- Shall display the following values:
 - Pump running/standby, Pump speed in Hz, User adjustable parameters such as PID set points, Motor frequency, Motor current, Threshold set points for PID error, Min operating frequency, Troubleshooting and diagnostics of faults

Transducer:

- The transducer shall be rated for required system pressure and shall be 4-20 mA analog
- Separate transducers shall be supplied for each variable frequency drive to ensure redundancy

Centrifugal pump:

- Shall have a cast iron casing with 304 stainless steel impellers. (All Stainless Steel pumps are an available upgrade)
- Shall have a 316 stainless steel shaft sleeve. Mechanical seal shall be rated to withstand pressure of up to 142 PSI
- Motor shall be to totally enclosed fan cooled (TEFC). and manufactured in compliance with CE, RoHS and CSA

Pneumatic expansion tank:

- Pneumatic expansion tank shall be rated for use with potable water with an operating pressure of a maximum 125 PSI
- Pre-charged to a pressure of 10 PSI below system operating pressure for system to run properly

Manifolds, valves and fittings:

- Manifolds are designed for either right or left access
- Shall be sized appropriately to allow water velocity not exceeding 10 ft/sec, to minimize cavitation and turbulence
- Check valves shall be silent and spring-loaded

Installation:

- Equipment shall be installed in accordance with applicable local building, electrical and plumbing codes
- Shall be installed indoors (unless otherwise specified) and protected from water spray

Electrical

Yaskawa VFD UL 508C Power Conversion
 CSA 22.2 Industrial Controls



CE

RoHS

Lovato Shut-off NEMA4



CE

RoHS
Pumps

Grundfos CM(I) SS Series NSF 61
 Grundfos CR(I) SS Series NSF 61
 Goulds 125MS Series NSF 61
 Goulds BF Series NSF 61
 Walrus TPH Series NSF 372



CE



CE



CE

CE

RoHS
Plumbing

Bluefin BVT200 Ball Valves NSF 61
 Webstone BVT200 Ball Valves NSF 61
 Bonomi Check 1000012 NSF 61
 Flomatic VFD Check NSF 61
 Victaulic 607 "E" Coupling NSF 61
 Victaulic 660 Cap NSF 61
 Amtrol PL Tank NSF 61
 Watts PLT Tank NSF 61
 Manifolds / piping Type L Copper
 Fittings Copper
 Discharge Riser Copper
 - Pressure Relief valve:
 - SS 4-20mA Transducer:
 - Pressure Gauges: CA AB1953

CE

CE

Sealants

Rectorseal Nokorode Flux NSF 61
 Worthington SILVER Solder NSF 61
 LocTite 567 Thread Sealant NSF 61
 Gasoila Thread Sealant NSF 61



Warranty: Provide VFD warranty, for one year from startup, not to exceed 18 months from the date of shipment. Warranty shall include parts, and labor allowance for repair hours.



Performance Features (Drive)

- Ratings:
 - 1 to 5 HP at 200-240 VAC 1-Ph.
 - 1 to 25 HP (ND) at 200-240 VAC 3-Ph.
 - 1 to 25 HP (ND) at 380-480 VAC 3-Ph.
- Overload Capacity:
 - 120% for 60 sec. (Normal Duty)
- Control Methods: V/f Control, Open Loop Current Vector Control
- DC injection braking, ramp to stop
- Electronic reversing
- Adjustable accel/decel: 0.01 to 6000 seconds
- Controlled speed range:
 - 40:1⁽¹⁾ 100:1⁽²⁾
- Speed Regulation:
 - ± 0.5 to 1% with slip compensation⁽¹⁾
 - ± 0.2%⁽²⁾
- Displacement power factor: 0.98
- Output frequency: 0 to 400 Hz
- Frequency resolution:
 - 0.01 Hz with digital reference
 - 0.06 / 60 Hz with analog reference
- Frequency accuracy:
 - 0.01% with digital command
 - 0.5% with analog command
- Volts / hertz ratio: infinitely adjustable pattern
- DC Injection braking: adjustable amplitude, duration, current limited
- Torque boost: full range, auto
- Power loss ride-thru: 0.5 sec.
- Speed search
- Auto restart
- 3 Critical frequency rejection settings
- Slip Compensation
- Energy Savings Function
- Enhanced PID with loss of feedback function

⁽¹⁾ V/f Mode

⁽²⁾ Open Loop Current Vector Mode

Design Features (Drive)

- Dual microprocessor logic
- Digital keypad operator, 5 digits
- LED status display
- Remote Mount Keypad Capability
- RJ-45 Style Digital Operator Connector
- 7 multifunction digital inputs
- 3 multifunction digital outputs
- Hardwire baseblock (EN954-1 Cat. 3)
- Programmable form C output contact for customer use: 1A at 250 VAC or 30 VDC
- 24 VDC control logic compatible with sourcing or sinking outputs (PNP or NPN)
- Carrier frequency: 15 kHz max; swing PWM
- 2 Remote speed references:
 - 0-10 VDC (20 kohms) or isolated 4-20 mA (250 ohms)
- Signal follower: bias and gain
- 2 programmable open collector outputs
- Analog monitor output:
 - 0-10 VDC proportional to output frequency or output current
- Approx. 400 parameters and monitors
- Digital pulse train input (33 kHz max.)
- Cooling fan controlled by drive run/stop
- RS-422/485 Modbus 115 kbps
- UL recognized electronic overload
- MTBF: 28 years
- NEMA 1 enclosure
- Side-by-Side mounting
- Maintenance monitors

Protective Features (Drive)

- Current limit, stall prevention during accel, decel, and run
- Motor and drive overload
- Over voltage prevention function
- Instantaneous over current
- Short circuit
- Under voltage
- Heatsink overheat
- Ground fault protection
- Over/under torque
- Short circuit current rating: 30kA rms sym.

Pump Control Features

- Operator keypad with intuitive pump language
- Hand-Off-Auto
- Programmable pump process set point
- Pump start level and start time
- Sleep protection
- Simplex, duplex and triplex control
- Automatic system restart
- No flow detection
- Low and high feedback set points
- Pre-charge low level control
- Thrust bearing control
- Automatic system stabilization
- Motor condensation pre-heat function

Pump Protective Features

- Dry well
- Air in system
- Blocked impeller
- Pump over cycling
- No flow protection
- Loss of prime
- Transducer loss
- Over torque

Pump Alarms and Messages


- Low feedback
- High feedback
- Low level
- Low water
- Pump over cycling
- No flow detection
- Loss of prime
- Pump fault
- Motor thermostat
- Pre-charge mode
- Thrust bearing active
- Start mode active
- Sleep mode active

MULTISTAGE CENTRIFUGAL PUMP

WALRUS

MULTISTAGE CENTRIFUGAL PUMP

TPH2T/4T/8T/12T

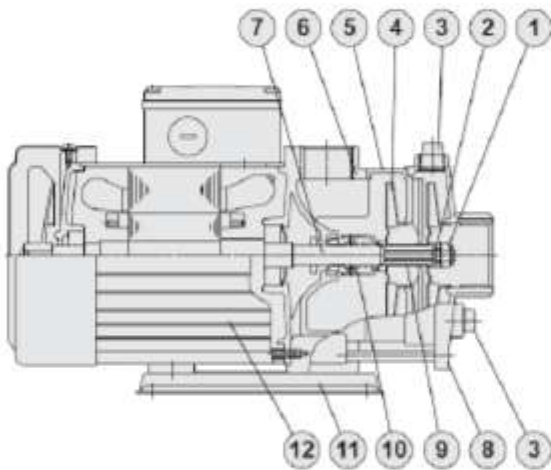

Motors:

- The pump is coupled with (TEFC) Totally Enclosed Fan Cooled, squirrel-cage motor.
- Nominal speed: 3500 rpm at 60Hz
- Protection class: IP54
- Insulation class: F

Pumps:

- Horizontal multi-stage centrifugal pump
- Non self-priming
- close coupled design
- Impellers mounted on extended motor shaft.

Materials

| No. | Part name | Material | | |
|-----|----------------------|-------------------------|----------|----------|
| | | Standard | S series | N series |
| 1 | Lock Nut | SUS 316 | SUS 316 | SUS 316 |
| 2 | Sleeve(Shaft End) | SUS 304 | SUS 304 | SUS 316 |
| 3 | Water Plug | FC 20 | SUS 304 | SUS 316 |
| 4 | Impeller | SUS 304 | SUS 304 | SUS 316 |
| 5 | Intermediate Chamber | SUS 304 | SUS 304 | SUS 316 |
| 6 | Pump Casing | FC 20 | SUS 304 | SUS 316 |
| 7 | Shaft | SUS 304 | SUS 304 | SUS 316 |
| 8 | Suction Chamber | FC 20 | SUS 304 | SUS 316 |
| 9 | Sleeve | SUS 304 | SUS 304 | SUS 316 |
| 10 | Mechanical Seal | Tungsten carbide + HNBR | | |
| 11 | Mounted Base | Coating Steel | SUS 316 | |
| 12 | Motor Shell | Aluminum alloy | | |

SUS 304 may be replaced by SUS316 depended on stock availability.

Operating Limits:

- Ambient temperature: Max. 104°F (40°C)
- Liquid temperature range: 32°F (0°C) to 194°F (90°C)
- Operating pressure: Max. 142 psi
- Inlet pressure: Max 85 psi

Suitable Liquids:

- Clean or other non-corrosive liquids





PRO-LINE®

Diaphragm Well Tanks: PL Series


125 PSIG Working Pressure

Construction

| | |
|-------------------|----------------------|
| Shell | Deep Drawn Steel |
| Diaphragm | Butyl |
| Liner | Polypropylene |
| System Connection | 304L Stainless Steel |
| Finish | Tan |
| Water Circulator | Turbulator™ |
| Air Valve | Projection Welded |
| Factory Precharge | 38 PSIG (2.6 bar) |

Application

- Controls pump cycling in residential well water systems.

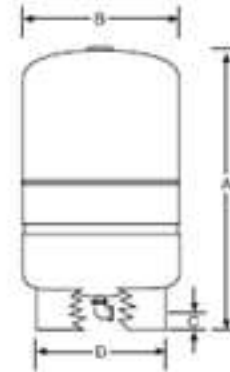

Performance

| | |
|-------------------------------|--------------------|
| Maximum Operating Temperature | 200°F (93°C) |
| Maximum Working Pressure | 125 PSIG (8.6 bar) |
| Maximum Relief Valve Setting | 100 PSIG (6.9 bar) |
| Warranty | 5 Year |

Stand Models

| Model | Tank Volume | | Max. Accept. Factor | A Tank Height | | B Tank Diameter | | C Sys. Conn. Centerline | | D Stand Diameter | | System Conn. (NPT) | | Shipping Weight | |
|--------|-------------|------|---------------------|---------------|------|-----------------|-----|-------------------------|-----|------------------|-----|--------------------|-----|-----------------|-----|
| | Gal. | Lit. | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | Lbs. | Kg. |
| PL-14 | 14.0 | 53 | 0.81 | 25 | 635 | 15 | 381 | 1 1/4 | 40 | 12 | 304 | 1 | 22 | 10 | |
| PL-20 | 20.0 | 76 | 0.67 | 32 | 813 | 18 | 457 | 1 1/4 | 40 | 17 | 304 | 1 | 28 | 13 | |
| PL-26 | 26.0 | 98 | 0.44 | 39 | 991 | 15 | 381 | 1 1/4 | 40 | 12 | 304 | 1 | 34 | 15 | |
| PL-32 | 32.0 | 121 | 0.35 | 47 | 1194 | 15 | 381 | 1 1/4 | 40 | 12 | 304 | 1 | 40 | 18 | |
| PL-34 | 34.0 | 129 | 1.00 | 30 | 762 | 22 | 559 | 1 1/4 | 49 | 20 1/2 | 521 | 1 1/4 | 50 | 23 | |
| PL-44 | 44.0 | 167 | 0.77 | 38 | 914 | 22 | 559 | 1 1/4 | 49 | 20 1/2 | 521 | 1 1/4 | 57 | 26 | |
| PL-62 | 62.0 | 235 | 0.55 | 47 | 1194 | 22 | 559 | 1 1/4 | 49 | 20 1/2 | 521 | 1 1/4 | 75 | 34 | |
| PL-81 | 81.0 | 301 | 0.41 | 57 | 1448 | 22 | 559 | 1 1/4 | 49 | 20 1/2 | 521 | 1 1/4 | 92 | 42 | |
| PL-86 | 86.0 | 326 | 0.54 | 47 | 1194 | 26 | 660 | 2 1/4 | 52 | 20 1/2 | 521 | 1 1/4 | 99 | 45 | |
| PL-119 | 119.0 | 450 | 0.39 | 62 | 1575 | 26 | 660 | 2 1/4 | 52 | 20 1/2 | 521 | 1 1/4 | 133 | 60 | |

All dimensions and weights are approximate.